


# CONVERTO 31 BW

Technical Sheet - Issue 02/2022

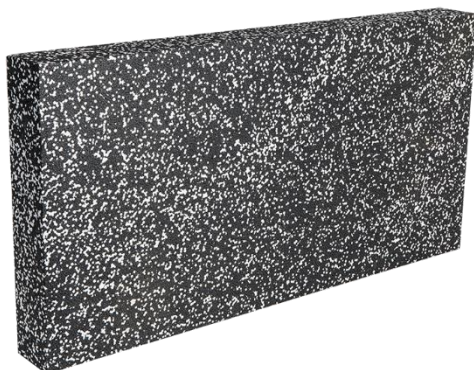

**Unstressed insulation panel suitable for external thermal insulation systems, made of sintered expanded polystyrene (EPS) with the addition of graphite.**

## DESCRIPTION

Unstressed thermal insulation panel made of sintered expanded polystyrene (EPS) with the addition of 70% graphite, cut from block and ideal for coat application: ETICS certified according to EAD guidelines 040083-00-0404 already ETAG 004 and UNI EN13499:2005, having the "Certificate of Conformity" [UNI EN 13163].

## MAIN PROPERTIES

- EASE OF INSTALLATION
- COST-EFFECTIVENESS
- RECYCLED CONTENT

## SIZE AND THICKNESS

Useful size: 100 cm x 50 cm

Available thicknesses: 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 14, 16, 18, 20 cm

TECHNICAL DATA	Symbol	Value	REFERENCE STANDARD
Thermal conductivity	$\lambda_D$	0.031 W/mK	EN 12667
Reaction to fire	EUROCLASS	E	EN 13501-1
Resistance to vapour diffusion	$\mu$	20-40	EN 12086
Specific heat	$C_p$	1450 J/kgK	EN 10456
Tensile strength perpendicular to the surface	TR	$\geq 120$	EN 1607
Dimensional stability	DS(N)	$\pm 0.2\%$	EN 1603
Water absorption due to partial immersion	WIp	$\leq 0.5 \text{ Kg/m}^2$	EN 16535
Shear strength	$F_{tk}$	$\geq 70 \text{ kPa}$	EN 12090
Shear modulus	$G_m$	$\geq 1000 \text{ kPa}$	EN 12090
<b>Dimensional tolerances</b>			
Length	L(2)	$\pm 2 \text{ mm}$	EN 822
Width	W(2)	$\pm 2 \text{ mm}$	EN 822
Thickness	T(1)	$\pm 1 \text{ mm}$	EN 823
Squareness	S(2)	$\pm 2 \text{ mm/m}$	EN 824
Flatness	P(3)	$+ 3 \text{ mm}$	EN 825

# CONVERTO 31 BW

Technical Sheet - Issue 02/2022



## STORAGE PROCEDURE

Heat-reflecting material: do not cover the slabs with transparent materials and/or sheets during installation and storage.

## NOTES

- If the slabs are exposed to UV light for a long period of time during installation, they should be protected by shading nets to prevent surface chalking (yellowing).
- If, due to prolonged exposure to UV light, surface powdering has occurred (the slabs appear yellowed), completely remove this powdery substance by sanding and brushing before applying the skim coat, in order to ensure proper and effective adhesion.

## CERTIFICATIONS/CLASSIFICATIONS



IVAS Industria Vernici S.p.A. – Via Bellaria, 40 – 47030 San Mauro Pascoli (FC) – Italy  
Tel. +39 0541 815811 – Fax +39 0541 815815 – [www.gruppoivas.com](http://www.gruppoivas.com) – [ivas@gruppoivas.com](mailto:ivas@gruppoivas.com)

This Technical Information Sheet is compiled to the best of our technical/scientific knowledge; however, it does not imply any liability on our part, as the conditions of use are outside our control. It is recommended that the product is always checked as being suitable for the specific application.